

SMOOT ATAYLOR



MODEL C

Magnum Systems' Model-C Packers are engineered for most granular, free-flowing materials, such as seed, fertilizer, plastic pellets, grain, and sand. These pneumatic packers introduced Magnum's patented reverse flow, and are designed to yield exact measurements at high speeds.

PACKAGE GRANULAR AND FREE-FLOWING MATERIALS WITH SPEED AND PRECISION

Features

- Regenerative blower
- Pneumatic bag clamp
- Pneumatic bag kicker
- 4,000 cubic inch product hopper
- T-4000 weigh controller with digital readout


Optional Features

- Stainless steel construction/contact areas
- Flip-over spout printer
- T-3000 weigh controller
- TRV-1000 robotic bag placer
- TRUSeal ultrasonic sealer
- Integrate conveying and palletizing equipment

Materials Typically Handled

- Certified seeds
- Fertilizers
- Plastic pellets
- Grains
- Sand





VALVE BAG AIR PACKER

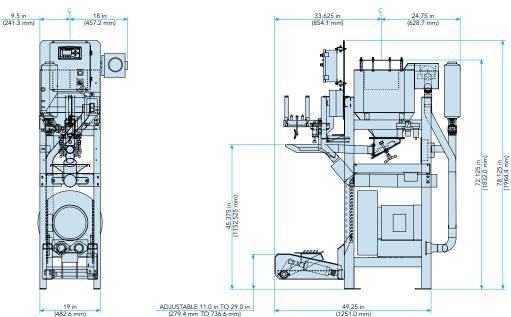


Diagram dimensions are for reference only*

SPECIFICATIONS

Speed	Up to 10 BPM/spout
Accuracy	Up to 0.4%
Bag Weight Range	15 to 125 lb (6.8 to 56.7 kg)
Scale	Analog, digital
Construction	Tubular carbon steel blasted and painted
Product Hopper	4,000 cubic inch (6,550 cubic centimeter) capacity (standard)
Spout Size	1.5 in (3.81 cm) diameter, up to 2.5 in (6.45 cm) diameter
Electrical Requirements	230/460 volt, 3 phase, 60 hertz (Blower)
Air Requirements	90 PSI (6.2 BAR) 0.5 cubic feet (0.014 cubic meter) per cycle 200-300 CFM (dust control recommended)



ULTRASONIC SEALER

- Ultrasonic waves alter molecular structure of sealing agent without heat, which reduces product degradation
- Rigid mount setup at filling source decreases amount of bag movement while maintaining bag shape
- Ultrasonic waves displace product from seal area providing a clean, positive seal
- Helps prevent product loss during shipping
- Capable of both plastic and paper valve sealable bags
- Works well with dusty, fluid, powder, and hydroscopic products



©2024 Magnum Systems, Inc. All rights reserved. Catalog number MS.1008.0824



www.magnumsystems.com

Toll Free 800.748.7000 Fax 913.362.7863 7945 Flint Street, Lenexa, KS 66214